

THE MOBILE RANGE


# DATASHEET

## THE MOBILE RANGE - SMALL, LIGHT AND ROBUST


Lift it, push it, turn it or swing it around, this selection of compact, lightweight dehumidifiers is built for mobility.

### TECHNICAL DATA


CR80B

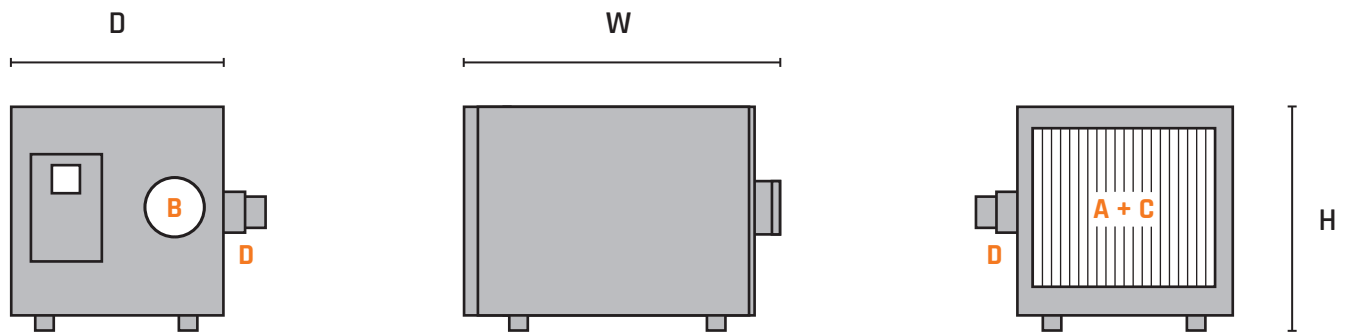

CR240B / CR290B

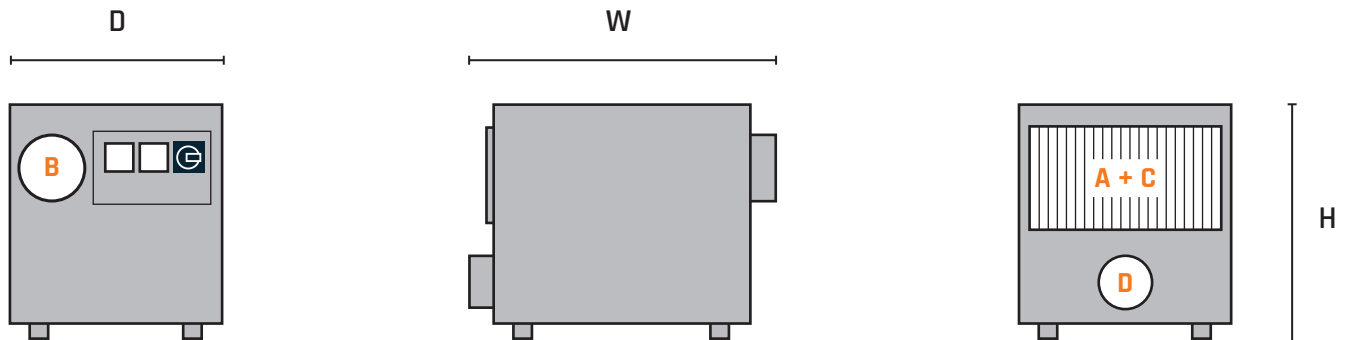

CR400B

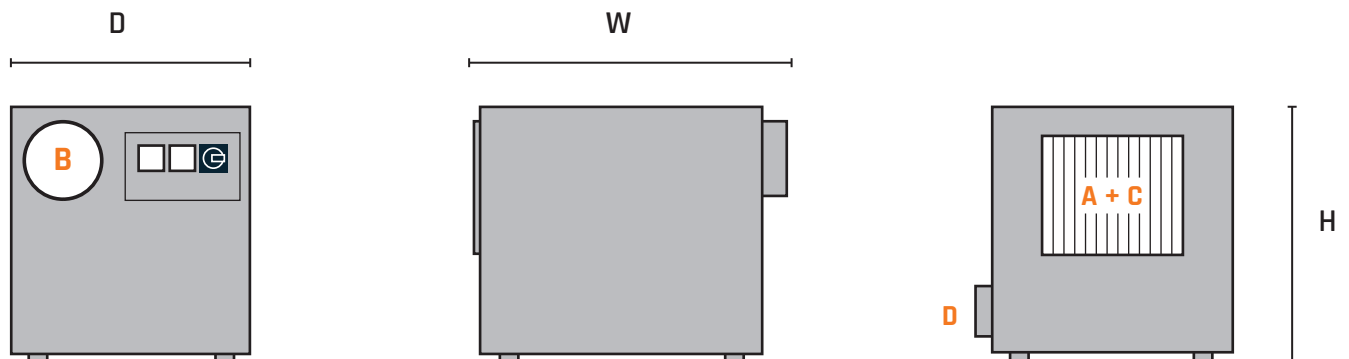

## THE MOBILE RANGE

# TECHNICAL DATA

THE MOBILE RANGE					
		CR80B	CR240B	CR290B	CR400B

### TECHNICAL DATA

DRY AIR NOMINAL	m <sup>3</sup> /h	80	240	290	400
REGENERATION AIR NOMINAL	m <sup>3</sup> /h	40	40	65	90
SUPPLY/PHASES	V/Ph	1 x 230 / PE	1 x 230 / PE	1 x 230 / PE	1 x 230 / PE
CONNECTED LOAD	kW	0.83	1.05	1.63	1.97
REGENERATION AIR HEATER	kW	0.77	0.94	1.4	1.84
MAXIMUM FUSE SIZE	A	10	10	10	10
EXT. PRESSURE PROCESS AIR	Pa	50	50	30	50
EXT. PRESSURE REGENERATION AIR	Pa	60	50	50	50
MOISTURE REMOVAL CAPACITY	kg/h	0.44	0.8	1.1	1.4

### DIMENSIONS AND WEIGHT

W WIDTH	mm	313	335	335	410
D DEPTH	mm	385	400	400	470
H HEIGHT	mm	293	335	335	405
WEIGHT (ELECTRICAL)	kg	15	18	19	28

### DUCT CONNECTIONS

<b>A</b> PROCESS AIR INLET	mm	231 x 257	180 x 200	180 x 200	210 x 350
<b>B</b> PROCESS AIR OUTLET	mm	Ø80	Ø100	Ø100	Ø125
<b>C</b> REGENERATION AIR INLET	mm	231 x 257	180 x 200	180 x 200	210 x 350
<b>D</b> REGENERATION AIR OUTLET	mm	Ø50	Ø80	Ø80	Ø80